CHAPTER 6

RESTORATION PRIORITIES IN THE TENNESSEE WESTERN VALLEY (BEECH RIVER) WATERSHED

- 6.1. Background
- 6.2. Comments from Public Meetings
 - 6.2.A. Year 1 Public Meeting
 - 6.2.B. Year 3 Public Meeting
 - 6.2.C. Year 5 Public Meeting
- 6.3. Approaches Used
 - 6.3.A. Point Sources
 - 6.3.B. Nonpoint Sources

6.1. BACKGROUND.

The Watershed Water Quality Management Plan serves as a comprehensive inventory of resources and stressors in the watershed, a recommendation for control measures, and a guide for planning activities in the next five-year watershed cycle and beyond. Water quality improvement will be a result of implementing both regulatory and nonregulatory programs.

In addition to the NPDES program, some state and federal regulations, such as the TMDL and ARAP programs, address point and nonpoint issues. Construction and MS4 storm water rules (implemented under the NPDES program) have transitioned from Phase 1 to Phase 2. More information on storm water rules may be found at: http://www.state.tn.us/environment/wpc/stormh2o/MS4.htm.

This Chapter addresses point and nonpoint source approaches to water quality problems in the Tennessee portion of the Tennessee Western Valley (Beech River) Watershed.

6.2. COMMENTS FROM PUBLIC MEETINGS. Watershed meetings are open to the public, and most meetings were represented by citizens who live in the watershed, NPDES permitees, business people, farmers, and local river conservation interests. Locations for meetings were chosen after consulting with people who live and work in the watershed. Everyone with an interest in clean water is encouraged to be a part of the public meeting process. The times and locations of watershed meetings are posted at: The locations times and of watershed meetings are posted at: http://www.state.tn.us/environment/wpc/watershed/public.php.

<u>6.2.A.</u> Year 1 Public Meeting. The first Tennessee Western Valley (Beech River) Watershed public meeting was held as two meetings: October 26, 1998 at Camden Town Hall and October 27, 1998 at Savannah City Hall. The goals of the meeting were to: (1) present, and review the objectives of, the Watershed Approach, (2) introduce local, state, and federal agency and nongovernment organization partners, (3) review water quality monitoring strategies, and (4) solicit input from the public.

Major Concerns/Comments

- TVA and TDEC/WPC need to coordinate monitoring efforts in order to be efficient and make the most uses of resources
- Savannah needs to make long-range plans for expansion of their wastewater treatment system and will need to have an allocation for a discharge into the Tennessee River

6.2.B. Year 3 Public Meeting. The second Tennessee Western Valley (Beech River) Watershed public meeting was held March 15, 2001 at the Decaturville Courthouse. The goals of the meeting were to: (1) provide an overview of the watershed approach, (2) review the monitoring strategy, (3) summarize the most recent water quality assessment, (4) discuss the TMDL schedule and citizens' role in commenting on draft TMDLs, and (5) discuss BMPs and other nonpoint source tools available through the Tennessee Department of Agriculture 319 Program and NRCS conservation assistance programs.

Major Concerns/Comments

- Shallow aquifers were once available for single houses. Now, they are contaminated so wells have to be drilled deeper
- More BMPs are needed. More grass should be planted along eroding stream banks
- Some building is going on in the floodplain.

<u>6.2.C. Year 5 Public Meeting.</u> The third scheduled Tennessee Western Valley (Beech River) Watershed public meeting was held December 1, 2005 at Community South Bank in Parsons. The meeting featured six educational components:

- Overview of draft Watershed Water Quality Management Plan slide show
- Benthic macroinvertebrate samples and interpretation
- SmartBoardTM with interactive GIS maps
- "How We Monitor Streams" self-guided slide show
- "Why We Do Biological Sampling" self-guided slide show
- TVA display

In addition, citizens had the opportunity to make formal comments on the draft Watershed Water Quality Management Plan.

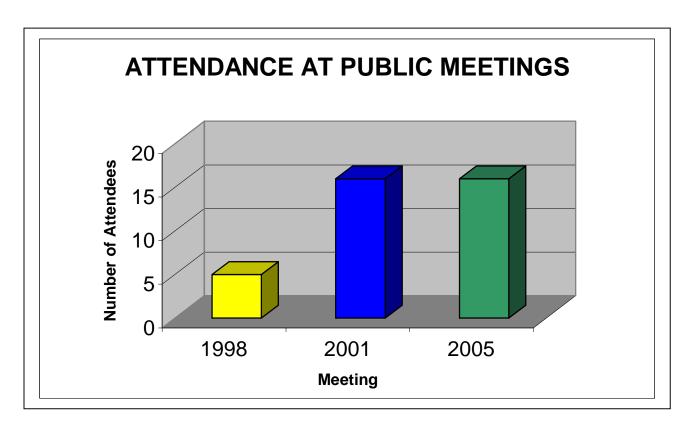


Figure 6-1. Attendance at Public Meetings in the Tennessee Western Valley (Beech River) Watershed. 1998 attendance number represents Tennessee Western Valley (Beech River and KY Lake) Watersheds joint meeting. Attendance numbers do not include TDEC personnel.



Figure 6-2. Watershed Meetings Provide a Good Opportunity for Citizens to Speak with Staff in a less Formal Setting.

6.3. APPROACHES USED.

6.3.A. Point Sources. Point source contributions to stream impairment are primarily addressed by NPDES and ARAP permit requirements and compliance with the terms of the permits. Notices of NPDES and ARAP draft permits available for public comment can be viewed at http://www.state.tn.us/environment/wpc/wpcppo/. Discharge monitoring data submitted by NPDES-permitted facilities may be viewed at http://www.epa.gov/enviro/html/pcs/pcs guery java.html.

The purpose of the TMDL program is to identify remaining sources of pollution and allocate pollution control needs in places where water quality goals are still not being achieved. TMDL studies are tools that allow for a better understanding of load reductions necessary for impaired streams to return to compliance with water quality standards. More information about Tennessee's TMDL program may be found at: http://www.state.tn.us/environment/wpc/tmdl/.

Approved TMDL:

Eagle Creek. TMDL for ammonia toxicity, organic enrischment, and low dissolved oxygen in the Tennessee Western Valley (Beech River) Watershed. Approved May 6, 2004.

http://www.state.tn.us/environment/wpc/tmdl/approvedtmdl/EagleDONH3 05.pdf

TMDLs are prioritized for development based on many factors.

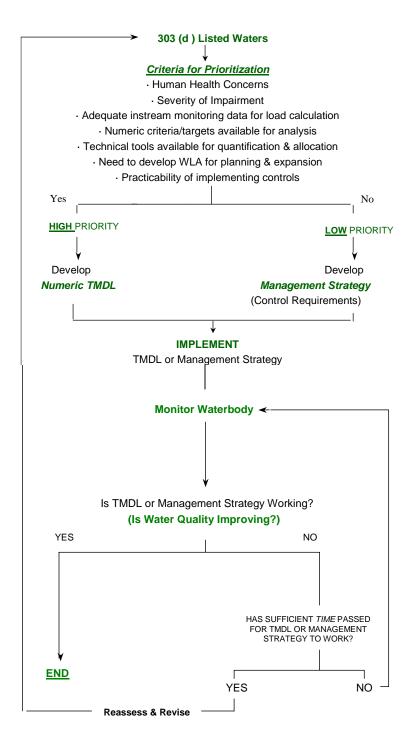


Figure 6.3. Prioritization Scheme for TMDL Development.

6.3.B. Nonpoint Sources

Common nonpoint sources of pollution include urban runoff, riparian vegetation removal, and inappropriate land development, agricultural, and road construction practices. Since nonpoint pollution exists essentially everywhere rain falls, existing point source regulations can have only a limited effect. Other measures are, therefore, necessary.

There are several state and federal regulations that address some of the contaminants impacting waters in the Tennessee portion of the Tennessee Western Valley (Beech River) Watershed. Most of these are limited to only point sources: a pipe or ditch. Often, controls of point sources are not sufficient to protect waters, so other measures are necessary. Some measures include efforts by landowners and volunteer groups and the possible implementation of new regulations. Many agencies, such as the Tennessee Department of Agriculture (TDA) and the Natural Resources Conservation Service (NRCS), offer financial assistance to landowners for corrective actions (like Best Management Practices) that may be sufficient for recovery of impacted streams. Many nonpoint problems will require an active civic involvement at the local level geared towards establishment of improved zoning guidelines, building codes, streamside buffer zones and greenways, and general landowner education.

The following text describes types of impairments, possible causes, and suggested improvement measures. Restoration efforts should not be limited to only those streams and measures suggested below.

6.3.B.i. Sedimentation.

6.3.B.i.a. From Construction Sites. Construction activities have historically been considered "nonpoint sources." In the late 1980's, EPA designated them as being subject to NPDES regulation if more than 5 acres were being disturbed. In the spring of 2003, that threshold became 1 acre. The general permit issued for such construction sites establishes conditions for maintenance of the sites to minimize pollution from storm water runoff, including requirements for installation and inspection of erosion controls. Also, the general permit imposes more stringent inspection and self-monitoring requirements on sites in the watershed of streams that are already impaired due to sedimentation. Examples in the Tennessee portion of the Tennessee Western Valley (Beech River) Watershed are Snake Creek, Stanley Branch, and an unnamed tributary to Little Beech Creek. Regardless of the size, no construction site is allowed to cause a condition of pollution.

Construction sites within a sediment-impaired watershed may also have higher priority for inspections by WPC personnel, and are likely to have enforcement actions for failure to control erosion.

The same requirements apply to sites that drain into high quality waters. Walker Branch, Pompeys Branch, and Right Fork of Whites Creek are examples of high quality streams in the Tennessee portion of the Tennessee Western Valley (Beech River) Watershed.

6.3.B.i.b. From Channel and/or Bank Erosion. Many streams within the Tennessee Western Valley (Beech River) Watershed suffer from varying degrees of streambank erosion. When steam channels are altered, or large tracts of land are cleared, storm water runoff, will cause banks to become unstable and highly erodable. Heavy livestock traffic can also severely disturb banks. Destabilized banks contribute to sediment load and to the loss of beneficial riparian vegetation to the stream. Some inappropriate agricultural practices have impacted the hydrology and morphology of stream channels in this watershed.

Several agencies such as the NRCS, TVA, and TDA, as well as watershed citizen groups, are working to stabilize portions of stream banks using bioengineering and other techniques. Many of the affected streams, like Mud Creek and Chalk Creek, could benefit from these types of projects. Other methods or controls that might be necessary to address common problems are:

Voluntary activities

- Re-establish bank vegetation (examples: Roberts Creek, Jack Branch, North Fork Blue Creek, Snake Creek, and an unnamed tributary to Little Beech Creek).
- Establish off-channel watering areas for livestock by moving watering troughs and feeders back from stream banks (examples: an unnamed tributary of Little Beech Creek).
- Limit cattle access to streams and bank vegetation (example: Little Beech Creek and an unnamed tributary to Little Beech Creek).

Additional strategies

- Increase efforts in the Master Logger program to recognize impaired streams and require more effective management practices (examples: Roberts Creek, Jack Branch, and North Fork Blue Creek).
- Better community planning for the impacts of development on small streams, especially development in growing areas (example: Eagle Creek).
- Limit livestock access to streams and bank vegetation (example: Little Beech Creek).
- Require post-construction run-off rates to be no greater than pre-construction rates in order to avoid in-channel erosion.
- Implement additional restrictions on logging in streamside management zones (examples: Roberts Creek, Jack Branch, and North Fork Blue Creek).
- Limit clearing of stream and ditch banks (examples: Snake Creek, Stanley Branch, and Chalk Creek). *Note: Permits may be required for any work along streams.*
- Limit to road and utilities crossings of streams.
- Restrict the use of off-highway vehicles on stream banks and in stream channels.

<u>6.3.B.i.c.</u> From Agriculture and Silviculture. The Water Quality Control Act exempts normal agricultural and silvicultural practices that do not result in a point source discharge. Nevertheless, efforts are being made to address impacts due to these exempted practices.

The Master Logger Program has been in place for several years to train loggers how to install Best Management Practices that lessen the impact of logging activities on streams. Recently, laws and regulations were enacted which established that these BMPs must be used or the Commissioners of the Departments of Environment and Conservation and of Agriculture would be permitted to stop the logging operation that, upon failing to install these BMPs, was causing impacts to streams. There have been several streams impacted by silviculture such as Roberts Creek, Jack Branch, and North Fork Blue Creek in Humphreys County.

Since the Dust Bowl era, the agriculture community has strived to protect the soil from wind and soil erosion. Agencies such as the Natural resources Conservation Service (NRCS), the University of Tennessee Agricultural Extension Service, and the Tennessee Department of Agriculture have worked to identify better ways of farming, to educate the farmers, and to install the methods that address the sources of some of the impacts due to agriculture. Cost sharing is available for many of these measures.

Many sediment problems traceable to agricultural practices also involve riparian loss due to close row cropping or pasture clearing for grazing. Agriculturally impacted streams that could benefit from the establishment of riparian buffer zones include Mud Creek, Stanley Branch, Snake Creek, and an unnamed tributary to Little Beech Creek.

6.3.B.ii. Pathogen Contamination.

Possible sources of pathogens are inadequate or failing septic tank systems, overflows or breaks in public sewer collection systems, poorly disinfected discharges from sewage treatment plants, and fecal matter from pets, livestock and wildlife washed into streams and storm drains. Permits issued by the Division of Water Pollution Control regulate discharges from point sources and require adequate control for these sources. Individual homes are required to have subsurface, on-site treatment (i.e., septic tank and field lines) if public sewers are not available. The Division of Ground Water Protection within the Jackson, Columbia, and Nashville Field Offices and delegated county health departments regulate septic tanks and field lines. In addition to discharges to surface waters, businesses may employ either subsurface or surface disposal of wastewater. The Division of Water Pollution Control regulates surface water disposal.

Currently, only one stream system in the Tennessee portion of the Tennessee Western Valley (Beech River) Watershed is known to have excessive pathogen contamination. This is Eagle Creek near the I-40 Exit 126. Soils in this area are poor for septic tanks, and two small domestic treatment systems do not provide adequate treatment. One business served by one system is no longer in service. The county governments of Benton and Decatur Counties are in the process of providing a regional treatment plant. It is currently in the design stage to serve this area.

Other measures that may be necessary to control pathogens are:

Voluntary activities

- Off-channel watering of livestock.
- Limit livestock access to streams.

- Improve and educate on the proper management of animal waste from feeding operations.
- Proper design and maintenance of septic tank and other wastewater treatment systems.

Enforcement strategies

- Strengthen enforcement of regulations governing on-site wastewater treatment.
- Determine timely and appropriate enforcement for non-complying sewage treatment plants, large and small, and their collection systems.
- Identify Concentrated Animal Feeding Operations not currently permitted.

Additional strategies

- Develop intensive planning in areas where sewer is not available and treatment by subsurface disposal is not an option due to poor soils, floodplains, or high water tables.
- Discourage the creation of "duck holes" that attract waterfowl.
- Develop and enforce leash laws and controls on pet fecal material.
- Greater efforts by sewer utilities to identify leaking lines or overflowing manholes.

6.3.B.iii. Excessive Nutrients and/or Dissolved Oxygen Depletion.

These two impacts are usually listed together because high nutrients often contribute to low dissolved oxygen within a stream. Since nutrients often have the same source as pathogens, the measures previously listed can also address many of these problems. Elevated nutrient loadings are also often associated with urban runoff from impervious surfaces, from fertilized lawns and croplands, and faulty sewage disposal processes. Nutrients are often transported with sediment, so many of the measures designed to reduce sediment runoff will also aid in preventing organic enrichment of streams and lakes.

Other sources of nutrients can be addressed by:

Voluntary activities

- Educate homeowners and lawn care companies in the proper application of fertilizers.
- Encourage landowners, developers, and builders to leave stream buffer zones.
 Streamside vegetation can filter out many nutrients and other pollutants before they reach the stream. These riparian buffers are also vital along livestock pastures. Examples of streams that could benefit are Mud Creek, Whiteoak Creek, Stanley Branch, Chambers Creek, Eagle Creek, an unnamed tributary to Little Beech Creek, and areas along stream channels.
- Use grassed drainage ways that can remove fertilizer before it enters streams (examples: Mud Creek and Stanley Branch).
- Use native plants for landscaping since they don't require as much fertilizer and water.

Physical changes to streams can prevent them from providing enough oxygen to biodegrade the materials that are naturally present. A few additional actions can address this problem:

- Maintain shade over a stream. Cooler water can hold more oxygen and retard the growth of algae. As a general rule, all stream channels suffer from some canopy removal. An intact riparian zone also acts as a buffer to filter out nutrient loads before they enter the water.
- Discourage impoundments. Ponds and lakes do not aerate water. An example of a stream impacted by an impoundment is Brown's Creek below Brown's Reservoir. Note: Permits may be required for any work on a stream, including impoundments.

Regulatory strategies.

- Strengthen enforcement of regulations governing on-site wastewater treatment (example: Eagle Creek, where failing septic tank systems and domestic treatment plants have been ordered to upgrade).
- Impose more stringent permit limits for nutrients discharged from sewage treatment plants.
- Timely and appropriate enforcement for noncomplying sewage treatment plants, large and smnall, and their collection system.
- Identify Concentrated Animal Feeding Operations not currently permitted.

6.3.B.iv. Toxins and Other Materials.

Although some toxic substances are discharged directly into waters of the state from a point source, much of these materials are washed in during rainfalls from an upland location, or via improper waste disposal that contaminates groundwater. Beech Creek is an example of a stream impaired due to past improper waste disposal (PCBs). In the Tennessee portion of the Tennessee Western Valley (Beech River) Watershed, no streams are currently identified as being damaged by storm water runoff from industrial facilities or urban areas. More stringent inspection and regulation of permitted industrial facilities, and local strormwater quality initiatives and regulations, could help reduce the amount of contaminated runoff reaching state waters.

Many materials enter our streams due to apathy, or lack of civility or knowledge by the public. Litter in roadside ditches, garbage bags tossed over bridge railings, paint brushes washed off over storm drains, and oil drained into ditches are all blatant examples of pollution in streams.

Some of these problems can be addressed by:

Voluntary activities

- Provide public education.
- Paint warnings on storm drains that connect to a stream. (This would benefit streams in the Savannah area).
- Sponsor community clean-up days.
- Landscape public areas.

 Encourage public surveillance of their streams and reporting of dumping activities to their local authorities.

Enforcement strategies

- Prohibit illicit discharges to storm drains.
- Strengthen litter law enforcement at the local level.

6.3.B.v. Habitat Alteration.

The alteration of the habitat within a stream can have severe consequences. Whether it is the removal of the vegetation providing a root system network for holding soil particles together, the release of sediment, which increases the bed load and covers benthic life and fish eggs, the removal of gravel bars, "cleaning out" creeks with heavy equipment, or the impounding of the water in ponds and lakes, many alterations impair the use of the stream for designated uses. Habitat alteration also includes the draining or filling of wetlands.

Individual landowners and developers are responsible for the vast majority of stream alterations. Some measures that can help address these problems are:

Voluntary activities

- Sponsor litter pickup days to remove litter that might enter streams.
- Organize stream cleanups removing trash, limbs and debris before they cause blockage.
- Avoid use of heavy equipment to "clean out" streams (examples: Hardin Creek and Indian Creek).
- Plant native vegetation along streams to stabilize banks and provide habitat (examples: Roberts Creek, Jacks Branch, North Fork Blue Creek, and Horse Creek. Horse Creek, in the Savannah area, has several bank stabilization projects using bioengineering techniques).
- Encourage developers to avoid extensive use of culverts in streams.
- Restoring channelized and altered streams to stable channels with adequate riparian zones. Whiteoak Creek has been altered with heavy equipment and could benefit by a restoration project.

Current regulations

- Restrict modification of streams by such means as culverting, lining, or impounding.
- Require mitigation for impacts to streams and wetlands when modifications are allowed.

Additional Enforcement

Increased enforcement may be needed when violations of current regulations occur.